

 H2H

3000/3500kg IC Forklift Truck

CPCD(Q)30/35H3



1 Robust performance for various industrial applications

The IC truck CPCD(Q)30/35H3 is powerful, easy to operate and dependable. The forklift for loads between 3,000 and 3,500kg is particularly well suited for high loads in multi-shift operation and assignments in the harshest outdoor conditions.

2 Durable components for long-term usage



The CPCD(Q)30/35H3 is equipped with pneumatic tyres as standard and mature components for long-term operation and big loads under heavy and harsh conditions.

3 Safety assurance

The CPCD(Q)30/35H3 offers outstanding visibility of the load and the surroundings. Its high ground clearance is ideal for uneven surfaces and other outdoor environments.



[illegible]

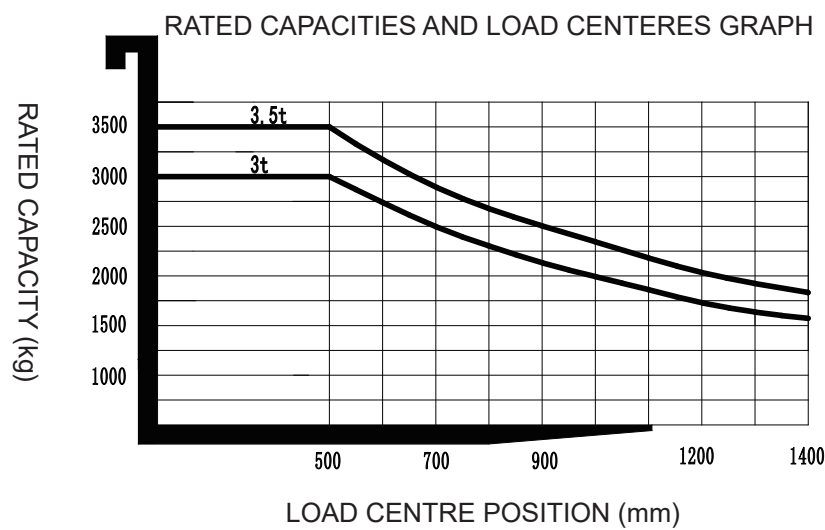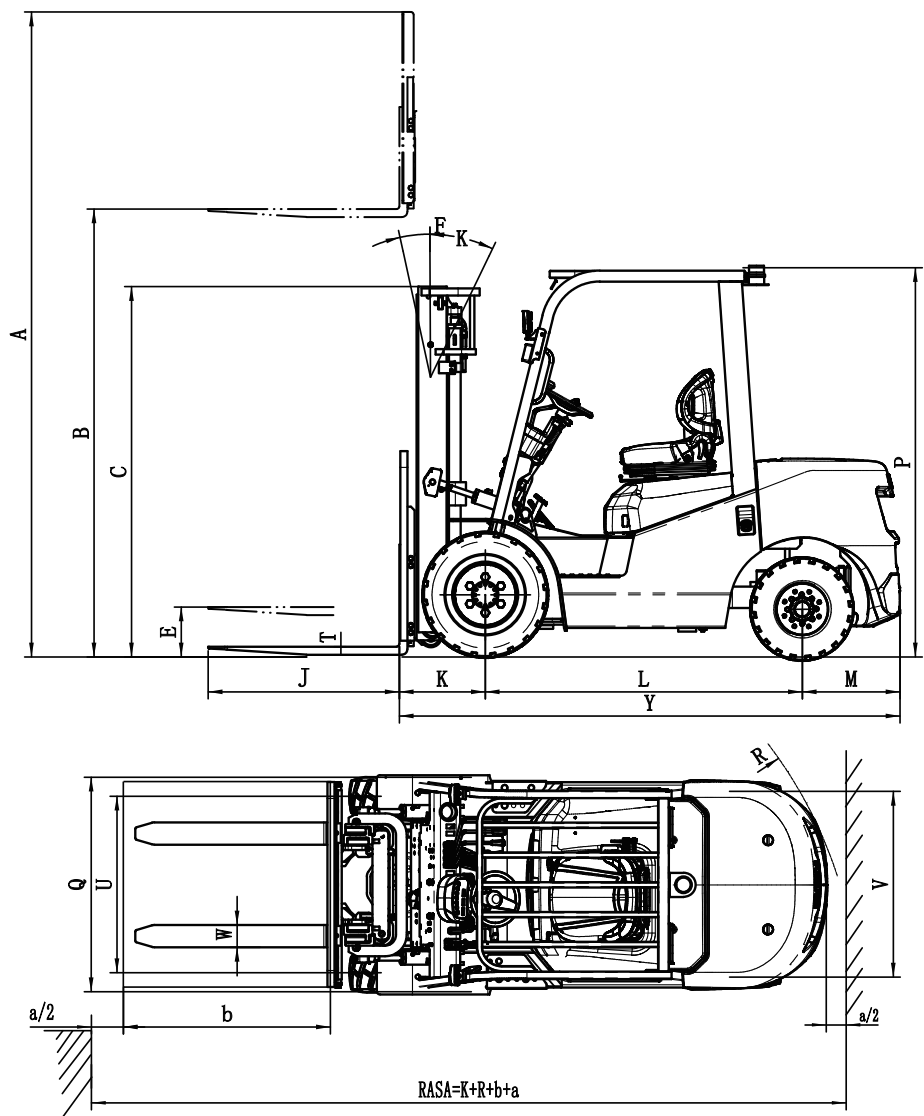

Type	Lift height h3	Height, mast			Height, Free lift(h2)		Load distance centre of drive axle to fork X		Tilt of mast/fork carriageforward/ backward		Load capacity			
		Height, mast lowered(h1)	Height, mast extended(h4)		No backrest	With backrest	3.0t	3.5t	α	β	500mm Load center distance			
			No backrest	With backrest							Single front tyre	Double front tyre	Single front tyre	Double front tyre
	mm	mm	mm	mm	mm	mm	mm	mm	Deg	Deg	kg	kg	kg	kg
Wide-view mast	2W200	1570	2570	3260	140	140	481	486	6	10	3000	3000	3500	3500
	2W250	1820	3070	3760	140	140	481	486	6	10	3000	3000	3500	3500
	2W270	1920	3270	3960	140	140	481	486	6	10	3000	3000	3500	3500
	2W300	2070	3570	4120	140	140	481	486	6	10	3000	3000	3500	3500
	2W330	2220	3690	4420	140	140	481	486	6	10	3000	3000	3500	3500
	2W350	2320	3890	4620	140	140	481	486	6	10	3000	3000	3500	3500
	2W360	2370	3990	4720	140	140	481	486	6	10	3000	3000	3500	3500
	2W400	2620	4040	5120	140	140	481	486	6	10	2850	3000	3250	3500
	2W430	2770	4340	5420	140	140	481	486	6	6	2700	2900	3000	3400
	2W450	2870	4290	5620	140	140	481	486	6	6	2550	2850	2850	3350
2-free mast	2F250	1805	2220	2900	1210	560	481	486	6	10	3000	3000	3500	3500
	2F270	1905	2320	3000	1310	660	481	486	6	10	3000	3000	3500	3500
	2F300	2055	2620	3300	1460	810	481	486	6	10	3000	3000	3500	3500
	2F330	2205	3870	4550	1610	960	481	486	6	10	3000	3000	3500	3500
	2F360	2355	4020	4710	1760	1110	481	486	6	10	3000	3000	3500	3500
	2F400	2605	4420	5100	2060	1410	481	486	6	10	2850	3000	3250	3500
	3F430	2095	4910	5570	1360	730	495	500	6	6	2550	2850	2850	3350
	3F450	2175	5070	5750	1460	810	495	500	6	6	2400	2700	2700	3200
3-free mast	3F480	2280	5375	6050	1565	915	495	500	6	6	2250	2550	2450	2950
	3F500	2365	5570	6250	1610	960	495	500	6	6	1850	2250	2300	2800
	3F550	2615	6150	6830	1770	1120	495	500	3	6	1650	2250	1800	2550
	3F600	2865	6570	7250	2020	1370	495	500	3	6	1200	2100	1300	2300

No.	Optional items	CPC(Q)D30-35H3
1.1	Fork dimensions	●122*45*1070○122*45*1150○122*45*1220○122*45*1370○122*45*1520 ○122*45*1600○122*45*1700○122*45*1820○122*45*2000○122*45*2200○122*45*2400
1.4	Fork carriage width	●1100mm○Yes and can be customized
1.5	Fork carriage height	●1095mm○Yes and can be customized
2.5	Front tyre	●Pneumatic○Solid○Non-marking solid
2.6	Rear tyre	●Pneumatic○Solid○Non-marking solid
2.7	Seat	●Regular○Premium○Suspension○Suspension + seatbelt logic switch
2.8	Attachment	●No○Built-in sideshift○External sideshift○Fork positioner
2.10	Traction pin	●Yes
3.4	Front light	●LED
3.5	Rear light	●No○LED
3.6	Warning light	●Yes
3.7	Steering light	●Yes
3.8	Blue spot	●No○2 front○1 rear○2 front + 1 rear
3.9	Area warning light	●No○Red lights on both sides
3.10	Rearview mirror	●1 rearview mirror○Add 2 on both sides
3.11	Buzzer	●Yes
3.16	OPS	●No○Yes and not customized
3.20	Remote monitoring	●No○Yes and not customized
4.1	Cabin	●No○Basic half cabin○Upgrade half cabin○Full cabin

Note: ●Standard ○Optional